

# QUALITY BUILT SHORT THROW WOOFER OPTIMISED FOR SEALED ENCLOSURES



UPC: 685757152938  
 EAN: 0685757152938  
 Printed: 685757152938

## DETAILED TECHNICAL DATA

Power Handling (Per Driver): 250W WRMS (@0%Thd)  
 Maximum Burp Power (Per Driver): 500w (@0%Thd)  
 Nominal Impedance: 4 ohm  
 DC Impedance: 3.2 ohm  
 Voice Coil: 50.8 mm  
 Voice Coil Layers: 4  
 Magnet: 120mm x5mm  
 Magnet Type: Y25 Ferrite

## BOX COMPATIBILITY

Recommended Box Type: Sealed  
 Recommended Box Size: 15>45 Litres  
 Optimal Frequency Response: 30>100Hz



## INSTALLATION POINTS

Failure to observe any of these installation points will invalidate your warranty:

- Do not run this subwoofer infinite baffle.
- Ensure your enclosure is within the specification listed.
- Only use correctly rated non-combustible cables.

## TEAM TIPS

- We recommend to put all subwoofers in your system in a box with a shared air space.
  - Remember that larger enclosures offer a deeper bass, whilst smaller ones offer more instant punch.
- Also, filling the enclosure with Dacron will give a deeper sound but still with the punch of the current enclosure size.

- For setting subwoofers it is possible to make a useful DIY clip detector. Wire an old tweeter and high voltage capacitor (we recommend a 250V 6.8uF) in line with the subwoofer. Next, play a 50Hz tone. Turn the gain up slowly until the tweeter makes a distinctive metallic rasp then back the gain off a small amount until the tweeter stops making the noise. Only use a tweeter you do not need as this can damage the tweeter.


## TS PARAMETERS

Name	Value	Unit	Note
RE	3.21	OHM	Electrical voice coil resistance at DC
KRM	0.0012	OHM	Wright inductance model
ERM	0.96		Wright inductance model
KXM	0.0107	OHM	Wright inductance model
EXM	0.82		Wright inductance model
CMES	959.18	UF	Electrical capacitance representing moving mass
LCES	17.53	MH	Electrical inductance representing driver compliance
RES	40.44	OHM	Resistance due to mechanical losses
FS	38.8	HZ	Driver resonance frequency
MMS	99.754	G	Mechanical mass of driver diaphragm assembly including air load and coil
MMD	92.978	G	Mechanical mass of voice coil and diaphragm without air load
RMS	2.572	KG/S	Mechanical resistance of total driver losses
CMS	0.169	MM/N	Mechanical compliance of driver suspension
KMS	5.93	N/MM	Mechanical stiffness of driver suspension

Name	Value	Unit	Note
BL	10.198	N/A	Force factor BL product
LAMBDA	0.055		Suspension creep factor
QTP	0.744		Total Q factor considering all losses
QMS	9.458		Mechanical Q factor of driver in free air considering RMS only
QES	0.752		Electrical Q factor of driver in free air considering RE only
QTS	0.697		Total Q factor considering RE and RMS only
VAS	25.99		Equivalent air volume of suspension
MQ	0.194	%	Ref. efficiency (2 PI radiation using RE)
LM	85.05	DB	Sound pressure level (SPL at 1M for 1W @ RE)
LMOM	86.03	DB	Nom. sensitivity (SPL at 1M for 1W @ ZN)
RMSE Z	3.25	%	Root mean square fitting error of driver impedance Z(F)
RMSE HX	1.89	%	Root mean square fitting error of transfer function HX(F)
SD	330.06	CM2	Diaphragm area
XMAX	12	mm	Total linear movement

## FREQUENCY VS IMPEDANCE

Magnitude of electric impedance

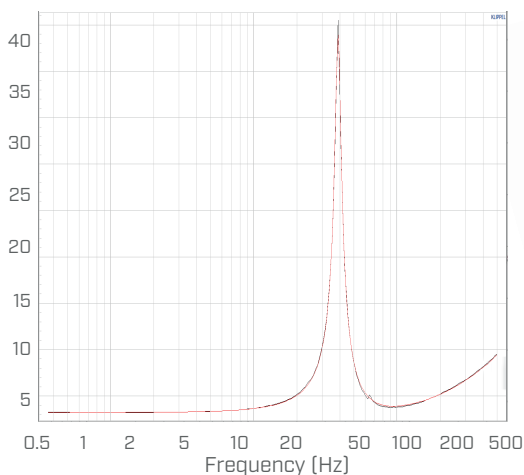

## TECHNICAL DRAWING

Total Diameter: 262 mm      Mounting Depth: 135 mm  
 Weight Approx. (Per a Driver): 3.3 Kg      Mounting Diameter: 229 mm

